

45

Patent
Attorney's Docket No. 027557-068

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE



In re Patent Application of

Sven MATTISSON et al.

Application No.: 09/976,862

Filed: October 15, 2001

For: DC OFFSET COMPENSATION

)
)
) Group Art Unit: 2661
)
) Examiner: Unassigned
)
)
)

CLAIM FOR CONVENTION PRIORITY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

United Kingdom Patent Application No. 0025314.6


Filed: October 16, 2000

In support of this claim, enclosed is a certified copy of said prior foreign application. Said prior foreign application was referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: February 6, 2002

By 
Kenneth B. Leffler
Registration No. 36,075

P.O. Box 1404
Alexandria, Virginia 22313-1404
(703) 836-6620

This Page Blank (uspto)



INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Signed 

Dated 15 October 2001

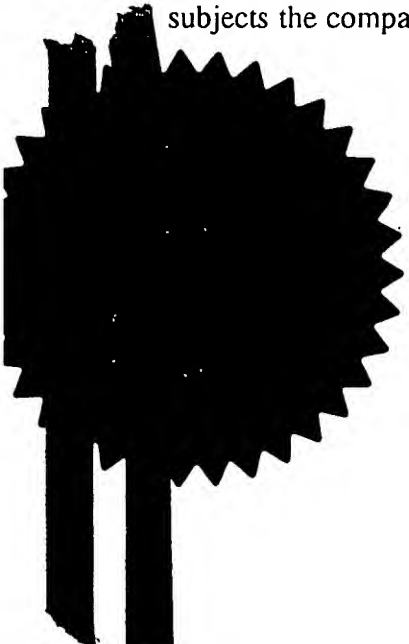

This Page Blank (uspro)

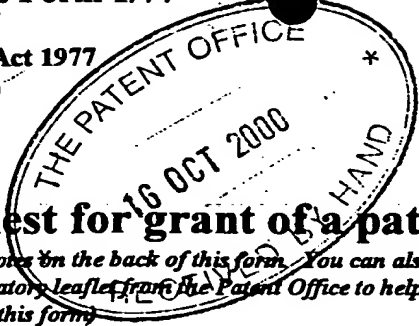

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

16 OCT 2000

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference HL76124/CIV 17OCT00 E576333-2 D02847
P01/7700 0.00-0025314.6

2. Patent application number 0025314.6
(The Patent Office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames) TELEFONAKTIEBOLAGET L M ERICSSON (PUBL)
SE-126-25 STOCKHOLM
SWEDEN

Patents ADP number (if you know it)
If the applicant is a corporate body, give the country/state of its incorporation

~~463730002~~
SWEDEN 78586/6001

4. Title of the invention
DC-OFFSET COMPENSATION

5. Full name of your agent (if you have one) Haseltine Lake & Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) Imperial House
15-19 Kingsway
London WC2B 6UD

Patents ADP number (if you know it)

34001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
--	---------	--	---------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)
---	-------------------------------	---------------------------------

8. Is a statement of inventorship and of right to a grant of patent required in support of this request? (Answer "Yes" if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d)) YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 8

Claim(s) 3

Abstract 1

Drawing(s) 1 + 1

10. If you are also filing any of the following,

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to a grant of patent (*Patents Form 7/77*) 0

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 0

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application

Signature

Herbert W. Lake

Date

13 October 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. C.I. Vigars

[0117] 9103200

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.

DC-OFFSET COMPENSATION

Field of the Invention

The present invention relates to DC-offset compensation. In particular, but not exclusively, the present invention relates to all kinds of communication systems where decisions require knowledge of the DC-offset of a signal. In particular, it applies to detection of frequency modulated (FM) signals in which data is sent in packets preceded by a preamble which is considerably more robust than the data in the payload, and where the preamble is not necessarily DC-free.

Background of the Invention

An ideal FM detector has a linear relationship between the instantaneous frequency deviation and the output of the detector. Moreover, in the ideal case the output of the detector for an un-modulated carrier would be known exactly. Without loss of generality this known value can be considered to be zero. This simply means that a positive frequency deviation will result in a positive output from the FM detector and a negative frequency deviation will result in a negative output (or vice versa). Since binary information is preferably transmitted by mapping a zero to a negative frequency deviation and a one to a positive frequency deviation, a hard decision can then simply be made by considering the sign of the output of the FM detector. If instead soft information was to be used, not only the sign, but also the actual value of the output of the detector would be used. This is also the case if non-binary alphabets were to be employed.

In practice there will be frequency offsets in the received signal, which are due to various imperfections at both the transmitter and the receiver. This means

that the output from the FM detector is not zero for an un-modulated carrier, and therefore zero cannot be used as a threshold to make a decision at the output of the FM detector. Thus, a proper choice of threshold has to be found. Since the frequency offset is not known beforehand and typically is not even constant through the reception of a packet, it has to be found and adjusted dynamically. There are several known ways to do this.

10 If the received data itself is DC-free, the DC-level can be found by integrating/low-pass filtering the received signal.

15 However, this approach inherently has the property that one has to trade accuracy for settlement time. To overcome this trade-off to some extent, one can use a smaller time-constant during the initial part of the packet to get a rapid but coarse DC-estimate, and then shift to a larger time-constant to obtain a smoother and more accurate DC-estimate once the coarse estimate is considered as completed.

20 Another known method for estimation of the DC-level is to make use of a circuit which clamps the maximum and the minimum values of the received signal. The average of these two values is then taken as the DC-level. This has the advantage of being very fast because the maxima and the minima of the signal are present at an early stage. For DC-estimation based on max-min, it is essential that the signal does not contain any spikes or similar phenomena, since the max/min detector will react to these. Moreover, since the DC-level may vary during the reception of a packet, the maximum and minimum values have to decay (towards the estimated DC), in order to guarantee that such variations actually can be followed. The rate of this decay will be a trade-off between being able to follow

a varying DC-level and having as stable DC estimate as possible.

Summary of the Invention

5 In the proposed method, DC estimation is done in two steps. A first, coarse, DC estimation is done during the reception of the preamble preceding the data packet. Some of the key properties of the proposed circuit in this phase is that it is fast, that it does
10 not require the preamble to be DC-free, and that it does not require the presence of the preamble to be known. The first part ends once the presence of a valid preamble is found, and then part two of the DC estimation commences. In this second part of the DC
15 estimation, the fact that the data can be assumed to be essentially DC free (due to the fact that the data is whitened) is exploited by the low-pass filtering the desired signal and in this way obtain the DC estimate. Both the first and the second step of DC estimation
20 have the ability to follow variations of the DC level throughout the preamble and the actual data packet, respectively.

 The present invention makes use of highly non-linear processing in the initial part, the so-called
25 preamble, of the data packet. In this way also very large offsets can be compensated for and there is no need for a DC-free preamble. By exploiting the fact that the maximum deviation from the actual DC level is known (since modulation of the system is known), the
30 DC-estimate is set. Once the preamble has been identified by the baseband processing, a control signal is sent to the circuit for DC-compensation which turns off the non-linear processing. During the rest of the packet, the DC-level is estimated by means of low-pass
35 filtering of the signal. Since the data is assumed to

be whitened, and therefore can be expected to have almost zero mean, this will result in a smooth DC-estimate which is able to track DC-variations in the packet which are due to, for instance, frequency drift.

5 It is emphasised that the term "comprises" or "comprising" is used in this specification to specify the presence of stated features, integers, steps or components, but does not preclude the addition of one or more further features, integers, steps or
10 components, or groups thereof.

 According to one aspect of the present invention, there is provided a method of estimating a DC offset level of an input signal having a preamble part and a data part, the method comprising:

15 during reception of a preamble part of an input signal, using an estimation method which does not rely on a DC-free signal to estimate the DC offset value of the input signal; and

 during reception of a data part of the input
20 signal, which data part follows the preamble part of the signal, using an estimation method which relies on a DC-free signal to estimate the DC offset value of the input signal.

25 Brief description of the Drawings

 Figure 1 illustrates one embodiment of the present invention

Detailed Description of the Preferred Embodiment

30 In the following, in order to ease the description, the principal behaviour is described when binary frequency modulation is used. However, it should be clear that the method is applicable whenever the decision making, hard or soft, requires that some
35 reference level/threshold is established. It will also

be readily appreciated that the method is not limited to binary modulation, but can be applied to non-binary modulation.

A circuit embodying one aspect of the present invention used for DC estimation is shown in Figure 1. The circuit of Figure 1 includes an input terminal 1 (v_{IN}), and an output terminal 2 (v_{out}). An amplifier 3 has one (+) of its two inputs connected to the input terminal 1, and has an output connected to the output terminal 2. A DC estimation circuit 4 is connected between the input terminal 1 and a second (-) input of the amplifier 3. As is well known, the amplifier 3 acts to output a signal which amplifies the difference between the two inputs (+, -) to the amplifier 3.

The DC estimation circuit 4 comprises a resistor R connected between the input terminal 1 and the second input (-) of the amplifier 3. A capacitor C is connected between ground and the second input (-) of the amplifier 3. A pair of diodes D1 and D2 is connected in parallel with the resistor R. The diode D1 is connected in forward bias from the input terminal 1 to a first terminal of a switch SW. That is, the anode of D1 is connected to the input terminal and the cathode of D1 is connected to the switch SW. The diode D2 is connected in reverse bias from the input terminal 1 to the first terminal of the switch SW. That is the cathode of D2 is connected to the input terminal 1 and the anode of D2 is connected to the switch SW. The second terminal of the switch SW is connected to the second input of the amplifier 3. Such an arrangement allows the diodes D1, D2 to be switched in and out of the circuit 4.

The diodes are not necessarily standard components, but rather they are preferably custom-built devices with the property that they behave in a similar

way to diodes. More precisely, a diode can be understood to be a nonlinear device where the relation between the voltage drop (v_d) over the diode and the current (i) passing through it as follows

5

$i=0$ if $v_d < v_{diod}$

and

10

$v_d = v_{diod}$ if $i > 0$

v_{diod} is a design parameter (rather than a fixed constant which is usually the case for standard components.

15

The output V_{DC} of the estimation circuit 4 provides an estimate of the DC level of the signal provided to the input terminal 1.

20

The voltage drop over the diodes D1, D2 when they are leading (forward biased), is v_{diod} , and this is set to correspond to the maximum frequency deviation of the received signal. For example, if the maximum frequency deviation is 100 kHz and the output voltage from the detector is 1 mV/kHz, v_{diod} is set to 100 mV. Assuming that there is a frequency offset of +200 kHz, and that initially $v_{DC} = 0$, this has the following effect. v_{DC} will instantaneously be set to the voltage

25

corresponding to the instantaneous frequency deviation minus the voltage drop over the diodes. This means that once the input signal has its maximum frequency deviation, the corresponding voltage, in this example, is 200 + 100 mV (offset + frequency deviation), and therefore $v_{DC} = 200$ mV (v_{in} - voltage drop over the diodes), which exactly corresponds to the true frequency offset. Note that if the time constant is very large, v_{DC} would remain at this level throughout

30

35

the packet, since the output signal from the detector will be in the range 100-300 mV, and as consequence, the diodes will not be on.

If the output voltage, in this example, from the detector due to noise is more than 300 mV, say 350 mV, then $v_{DC} = 250$ mV. However, this will be adjusted as soon as the signal from the detector has its minimum value, since then the other of the diodes will be on and force v_{DC} to be decreased. This is in sharp contrast to the max/min circuit estimation, where a too large estimate of the maximum would remain too large for a long time.

Now, since the preamble of the input signal is robust in the sense that it will be found even if some of the bits are in error, the primary concern is not a very accurate estimate but a very fast, although perhaps coarse, estimate, which is exactly what is achieved by the circuit of Figure 1.

The preamble is the part of the packet which is sent before the data. The preamble can include, for example, such information as a syncword, and a small number of symbols intended for Dc estimation. The exact contents are of no importance, but the preamble should have the property that its presence can be detected, which typically means that it contains such a syncword.

It is critical that one can determine when the preamble ends and where the data begins. This is possible due to the presence of a syncword in the preamble and that once this is found one knows exactly when the preamble ends.

When the preamble is found, the switch SW is opened, and for the remaining part of the packet, i.e. for the actual data, v_{DC} will be the low-pass (R-C) filtered version of the data. The choice of time

constant will then depend upon factors such as how much frequency drift can be expected during a packet.

CLAIMS

1. A method of estimating a DC offset level of an input signal having a preamble part and a data part, the method comprising:

5 during reception of a preamble part of an input signal, using an estimation method which does not rely on a DC-free signal to estimate the DC offset value of the input signal; and

10 during reception of a data part of the input signal, which data part follows the preamble part of the signal, using an estimation method which relies on a DC-free signal to estimate the DC offset value of the input signal.

15 2. A method of estimating a DC offset value of a frequency modulated input signal which comprises a preamble portion followed by a data portion, the method comprising:

20 estimating a DC offset value of the preamble portion of the input signal using a resistance and first and second diodes connected in parallel, the input signal being supplied to one terminal of the resistance, to the anode of the first diode and to the cathode of the second diode, and the DC estimate being supplied from a terminal connected with another
25 terminal of the resistance, with the cathode of the first diode and with the anode of the second diode; and

estimating a DC offset value of the data part of the input signal using a low pass filter which includes the said resistance.

30 3. A method as claimed in claim 2, wherein the voltage drop across each diode, when the diode is on, is set to equal the voltage deviation corresponding to a maximum frequency deviation of the input signal.

35 4. A circuit for estimating a DC offset value of an input signal comprising:

input and output terminals;

a low pass filter including a resistor and a capacitor, the resistor being connected between the input and output terminals and the capacitor being
5 connected between the output terminal and ground;

a pair of diodes operatively connected in parallel between the input and output terminals of the circuit, the first diode having its anode connected to the input terminal and its cathode connected to the
10 output terminal, and the second diode having its cathode connected to the input terminal and its anode connected to the output terminal; and

switch means operable to switch a connection to the output terminal, such that the pair of diodes is
15 connected to the output terminal during receipt of a preamble part of an input signal, and is not connected to the output terminal during receipt of a data part of the input signal subsequent to the preamble part thereof.

20 5. A circuit for estimating a DC offset level of an input signal, the circuit comprising:

input and output terminals;

a capacitance connected between the output terminal and ground;

25 a control unit having an input, and an output which is connected with the output terminal;

a resistance connected between the input terminal and the output terminal;

30 a first diode having its anode connected with the input terminal and its cathode connected with the input of the control unit; and

a second diode having its cathode connected with the input terminal and its anode connected with the input of the control unit;

35 wherein the control unit is operable to

selectively connect its input to the output terminal,
such that the first and second diodes are connected to
the output terminal during receipt of a preamble part
of an input signal, and such that the first and second
5 diodes are not connected to the output terminal during
receipt of a data part of the input signal subsequent
to the preamble part thereof.

ABSTRACT

DC-OFFSET COMPENSATION

5 A method of estimating a DC offset value of a
signal includes estimating a DC offset value of a
preamble part of the signal using a pair of diodes (D1,
D2) and a resistor (R) connected in parallel. During
receipt of the data part of the signal, the diode pair
(D1, D2) is switched out of the circuit by a switch
10 (SW). During reception of the data part, the DC level
is estimated using a low pass filter (R,C).

[Fig. 1].

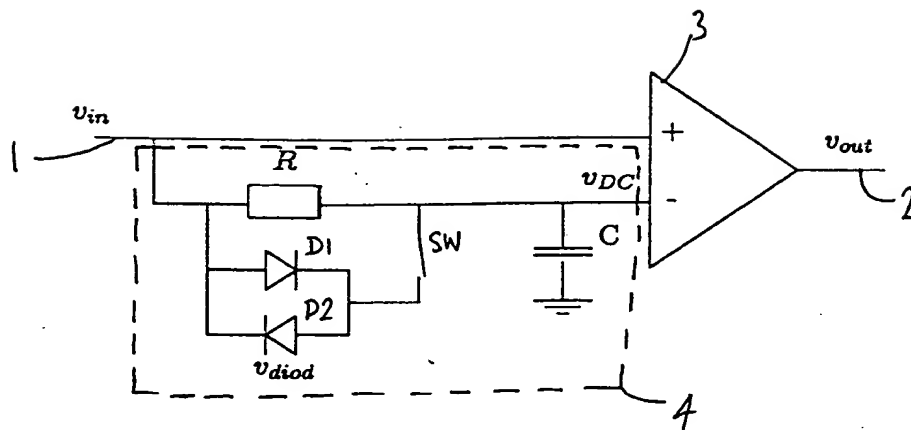


Figure 1

This Page Blank (uspfo)